









eco speed

eco



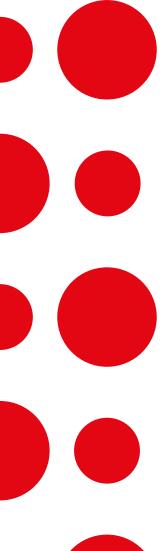

Thermozell

THE ORIGINAL SINCE 1992.

The optimal EPS* high-performance leveling bulk for the do-it-yourselfer. Ecological and economical.







ecological

By using **100% recycled** EPS you think about the environment.

economical

24 hours ready for covering (eco speed) and rapid drying of the ready-to-use lightweight concrete mixture allow easy processing without compaction.

Advantages of the bonded fill of Thermozell



Absolutely 100% free from HBCD



Homogeneous mixability due to a mix of additives



Dimensionally stable, lightweight and highly **resilient**



High strength without compaction



Suitable for **indoor** and **outdoor**



No different **settling behavior**



Rapid drying and ready for covering




Sufficient load bearing capacity




Easy, fast and dust-free application



Level surface



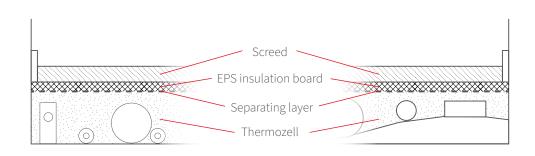



Level compensation

Installations, beam ceiling, vault, slope, etc



Foundation

Screeds, tiling, underfloor heating, etc



Backfill

Wall, ceiling, pool, etc






Learn more about Thermozell:



Thermozell Entwicklungs- und Vertriebs GmbH 9555 Glanegg 58, T +43 4277/2211 0, F +43 4277/2211 441, E office.thermozell@hirsch-gruppe.com, W www.thermozell.com

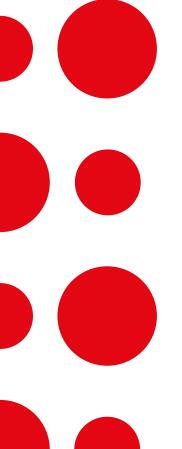

The Thermozell eco-series











eco 400 speed
The high-performance ready mix

eco 250 speed
The high-performance ready mix

eco 400 Ready mix

eco 250 Ready mix









The data in this technical information correspond to the state of our knowledge and experience.

Please check our products for their suitability for the specific application. If you have any questions, please do not hesitate to contact our regional representatives.